

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 996 288 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
26.04.2000 Bulletin 2000/17

(51) Int Cl.7: H04N 7/167

(21) Application number: 00200089.1

(22) Date of filing: 27.10.1995

(84) Designated Contracting States:

DE FR GB

Designated Extension States:

LT LV SI

(30) Priority: 28.10.1994 JP 28913994  
25.01.1995 JP 3005695

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
95307676.7 / 0 710 025

(71) Applicant: SONY CORPORATION  
Tokyo 141 (JP)

(72) Inventors:

- Kubota, Yukio  
Shinagawa-ku, Tokyo 141 (JP)
- Goto, Koichi  
Shinagawa-ku, Tokyo 141 (JP)

(74) Representative: DeVile, Jonathan Mark et al  
D. Young & Co.,  
21 New Fetter Lane  
London EC4A 1DA (GB)

## Remarks:

This application was filed on 12 - 01 - 2000 as a  
divisional application to the application mentioned  
under INID code 62.

(54) Digital signal transmitting methods, digital signal receiving apparatus, and recording media

(57) A digital signal transmitting method, a digital  
signal receiving apparatus (40), and a recording medium (101) ensure the security of fee-charged software  
information. When an image providing predetermined  
services is transmitted, a band-compression coded dig-

ital video signal is subjected to first-encryption process-  
ing and then the digital signal is subjected to further en-  
cryption processing and transmitted. Therefore, double  
security can be added to the video signal and a digital  
signal transmitting method of more firmly ensured secu-  
rity can be realized.

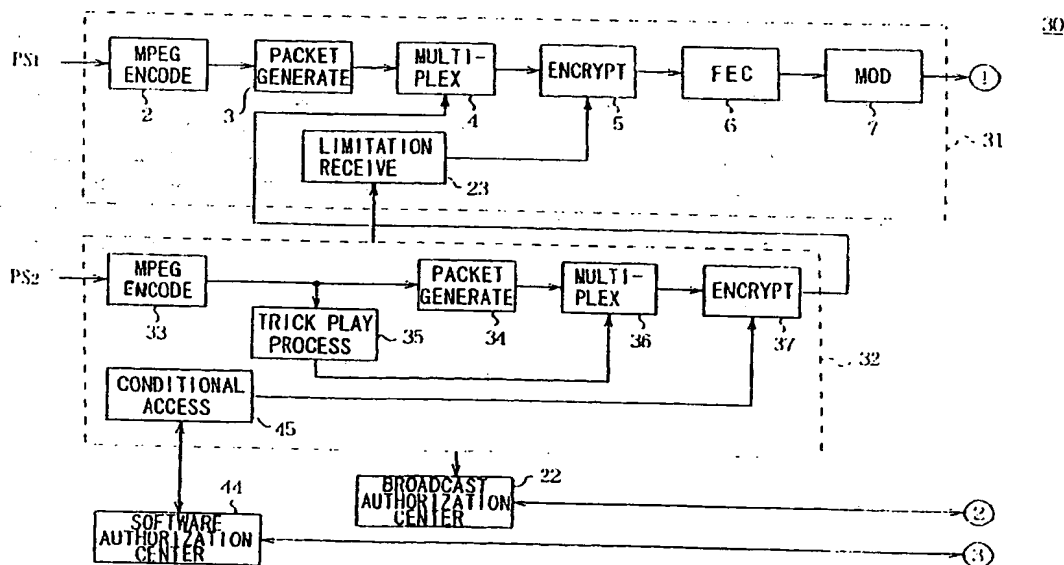


FIG. 4

## Description

**[0001]** This invention relates to digital signal receiving apparatus, and is applicable, for example, to a digital signal transmitting system which provides fee-charged software information to contract users.

**[0002]** In a previously proposed digital signal transmitting system using satellites or cables, as shown in Fig. 1, a program source PS, input to a digital signal transmitting apparatus, i.e., a broadcasting station 1, is band-compression coded with a moving picture image coding experts group (MPEG) method by means of an MPEG encoder 2 and is converted to packet transmission data by means of a packet generation section 3.

**[0003]** The packetized transmission data is multiplexed by a multiplexer 4, then the transmission data is scrambled for security by an encryption processing section 5, and finally keys (ciphers) are put over the scrambled data many times so that the scrambling cannot be descrambled easily. The encrypted transmission data is error corrected by a forward error correction (FEC) section 6 and modulated by a modulator 7. The modulated data is then sent through a digital satellite 8 directly to a digital signal receiving apparatus installed in a contract user's household, i.e., a terminal 10 (Fig. 2), or sent through the digital satellite 8 to a signal distributing station 9 (Fig. 2) which is called a head end. The data, transmitted to the signal distributing station 9, is sent to the terminal 10 via cable.

**[0004]** Now, as shown in Fig. 2, in the terminal 10, when the transmission data is directly sent via the satellite 8, the data is received by an antenna 11 and sent to a front end section 12. When the transmission data is sent from the signal distributing station 9 via the cable, it is inputted directly to the front end section 12. A user contracting with the broadcasting station 1 accesses a key authorized to each user to the terminal 10, with respect to the transmission data sent directly from the satellite 8 or from the satellite 8 via the signal distributing station 9, so that the user is authorized as a contract user and bill processing is performed, and at the same time, the user can appreciate desired software information.

**[0005]** That is, in the terminal 10, the transmission data is processed by the front end section 12 comprising a tuner, a demodulator, and an error corrector, and the processed data is input to a data fetch section 13. In the data fetch section 13, the multiplexed data is demultiplexed by the demultiplexer 14 so that the data is separated into an video signal, an audio signal, and data other than these signals. In a decryption section 15, ciphers are decrypted while performing bill processing. In a packet separation section 16, the decrypted data is packet separated. Finally, the compression of the data is expanded by an MPEG decoder 17, and the video and audio signals, which are digital-to-analog converted to analog signals, are output to television.

**[0006]** Incidentally, in the digital signal transmission

system, when fee-charged software information such as video on demand or near video on demand is transmitted, a digital storage 18 such as tape media or disk media is incorporated into or connected to the terminal 10 to meet the convenience of users and to effectively utilize a digital transmission path. In such a case, large amounts of software data have been downloaded to the storage 18 by making use of an unoccupied time band and an unoccupied transmission path, and when the user looks at the software information near at hand, the user accesses it with an ID card (for example, smart card) 19 to perform bill processing, and reproduction limitation is lifted.

**[0007]** More specifically, if the user accesses a central processing unit (CPU) 20 by means of the smart card 19, the CPU 20 performs an inquiry of registration to an authorization center 22 (Fig. 1) through a modem 21. The authorization center 22 confirms registration by means of a conditional access 23. If registration is confirmed, the authorization center 22 performs bill processing and also performs notification of confirmation to the CPU 20 through the modem 21.

**[0008]** The CPU 20 instructs decryption of key to a local conditional access 24 by this notification, and the local conditional access 24 decrypts a cipher which has been put over the data recorded on the storage 18. Hence, the reproduction limitation is lifted, and the packet of the data recorded on the storage 18 is separated by the packet separation section 16. The compression of the packet-separated data is decompressed (expanded) by the MPEG decoder 17 and then the expanded data is digital-to-analog converted to be output to television as the analog signal and audio signal A/V.

**[0009]** However, if, in the security system in a current broadcasting form, software information has been downloaded to the storage 18, as described above, to try to realize a system where this software can be appreciated when user wants to see it, then the following problems will arise.

**[0010]** More specifically, in the current digital signal transmitting system, when a cipher is decrypted by the decrypting section 15 and then software information is downloaded to the storage 18, as shown by point A in Fig. 3, fee-charged software cannot be downloaded to the storage 18 by decrypting the cipher without billing, because decrypting a cipher is, i.e., billing. Now, if only billing information is made free, all ciphers of data are decrypted, and downloaded to the storage 18, then a piece of software information is passed as it is and output from the terminal 10.

**[0011]** Also, in a case where the storage 18 is not incorporated into the terminal 10 but is connected to the terminal 10 and switching means is not provided between the decryption section 15 and the packet separation section 16, if ciphers are all decrypted and downloaded to the storage 18, then the decrypted data are all sent and there is the possibility that they can be seen for free at point C of Fig. 3 by persons other than

contract users.

**[0012]** To solve these problems, data can be downloaded to the storage 18 before ciphers are decrypted, i.e., after multiplex is demultiplexed by the demultiplexer 14 (point B of Fig. 3). If, however, data are downloaded to the storage 18 after multiplex is demultiplexed by the demultiplexer 14, there is the problem that intra-coded (I) pictures can not be pulled out and can not be reproduced at variable speed, because data remain encrypted.

**[0013]** Also, in broadcasting systems where data are encrypted, keys are changed annually or biennially to ensure security. Therefore, when a key is changed after software information is downloaded to the storage 18, there is the problem that ciphers cannot be decrypted and therefore the downloaded software information cannot be seen.

**[0014]** According to a first aspect of the invention there is provided a digital signal transmitting method wherein at least a band-compression coded digital video signal is given encryption processing and transmitted, in which when an image providing predetermined services is transmitted, the band-compression coded digital signal is given first-encryption processing and then the first-encryption processed digital signal is further given the encryption processing and transmitted.

**[0015]** According to a preferred form of implementing the method according to the first aspect of the invention, the band-compression coded and encryption processed digital signal is mixed with the digital signal where the band-compression encoding has been completed within a predetermined image unit, and the mixed signal is transmitted.

**[0016]** According to a second aspect of the invention there is provided a digital signal receiving apparatus (40) for receiving at least a band-compression coded digital video signal over which a first cipher is put and then a second cipher is put and which is transmitted by a broadcasting station, the apparatus comprising second decrypting means (15, 19) for decrypting the second cipher put over the digital signal; recording/reproducing means (73, 74, 75, 76, 77) for recording the digital signal, where the second cipher was decrypted, on a recording medium, and also for reproducing the digital signal recorded on the recording medium; and first decrypting means (46, 91) for decrypting the first cipher of a reproduction signal that is reproduced from the recording medium.

**[0017]** Furthermore, according to a third aspect of the invention, there is provided a recording medium (101) wherein at least a band-compression coded digital video signal has been encrypted and recorded.

**[0018]** A preferred form of implementation of the invention provides a digital signal transmitting method, a digital signal receiving apparatus, and a recording medium which are capable of ensuring security when fee-charged software information is transmitted.

**[0019]** The preferred form of implementation is de-

scribed in detail below with reference to the accompanying drawings. First, however, it will be described in outline.

**[0020]** When an image providing predetermined services is transmitted, a band-compression coded digital video signal is given first-encryption processing and then the digital signal is further given encryption processing and transmitted. Therefore, double security can be added to the video signal so that a digital signal transmitting method where its security is more firmly ensured can be realized.

**[0021]** Further, at least a band-compression coded and first-encryption processed digital video signal are mixed with the digital signal where the band-compression encoding has been completed within a predetermined image unit in a broadcasting station (30). Therefore, variable-speed reproduction image can be viewed without performing variable-speed reproduction processing at a terminal (40).

**[0022]** When a first cipher and a second cipher are put over a digital signal where at least an video signal was the band-compression coded, and the digital signal which is transmitted by the broadcasting station (30) is received, the second cipher of the received digital signal is decrypted by the second decrypting means (15, 19) and the second decrypted digital signal is recorded on a recording medium by means of recording/reproducing means (73, 74, 75, 77). At the time of reproduction, the first cipher of the reproduction signal which is reproduced from the recording medium is decrypted by the first decrypting means (46, 91). Hence, a digital signal receiving apparatus (40) where security is more firmly ensured can be realized.

**[0023]** Furthermore, there is provided a recording medium (101) wherein at least a band-compression coded digital video signal has been encrypted and recorded. With this, contract users are able to cheaply obtain the recording medium (101) where a plurality of pieces of encrypted software information are recorded, and are able to construct a new software information supply system where only information that users desire to see is billed and enjoyed.

**[0024]** The invention will now be further described, by way of illustrative and non-limiting example, with reference to the accompanying drawings, in which like parts are designated by like reference numerals or characters, and in which:

Fig. 1 is a block diagram showing the structure of a previously proposed digital signal transmitting apparatus;

Fig. 2 is a block diagram showing the structure of a previously proposed digital signal receiving apparatus;

Fig. 3 is a block diagram explaining problems occurring when, in the previously proposed digital signal receiving apparatus, software information is downloaded;

Fig. 4 is a block diagram showing the structure of a digital signal transmitting apparatus for use with an embodiment of the invention;

Fig. 5 is a block diagram showing the structure of a digital signal receiving apparatus according to an embodiment of the invention;

Fig. 6 is a block diagram showing the detailed structure of a sending section of the digital signal transmitting apparatus for use with the embodiment of the invention;

Fig. 7 is a block diagram showing the detailed structure of a software supply section of the digital signal transmitting apparatus for use with the embodiment of the invention;

Fig. 8 is a block diagram showing the detailed structure of a receiving section of the digital signal receiving apparatus according to the embodiment of the invention;

Fig. 9 is a block diagram showing the detailed structure of a recording/reproducing section of the digital signal receiving apparatus according to the embodiment of the invention;

Fig. 10 is a block diagram showing the schematic structure of a digital signal transmitting system of the embodiment; and

Fig. 11 is a block diagram explaining a software supply system of a package system.

**[0025]** Preferred embodiments of this invention will now be described with reference to the accompanying drawings:

(1) Structure of Digital Signal Transmitting Apparatus and Digital Signal Receiving Apparatus

**[0026]** In Fig. 4, where the same reference numerals are applied to parts corresponding with Fig. 1, reference numeral 30 denotes a digital signal transmitting apparatus for use with an embodiment of the invention. In the digital signal transmitting apparatus 30, i.e., a broadcasting station, when predetermined services, for example, fee-charged software data are transmitted, twofold security is ensured by putting a cipher of a storage system over software data and further putting a cipher of a broadcasting system over the software data.

**[0027]** The digital signal transmitting apparatus 30 is constituted by a digital signal sending section 31 and a software supply section 32. In the digital signal transmitting apparatus 30, when fee-charged software information, for example, image software, music software, electronic program list, shopping information, game software, or education information is requested by users, as shown in Fig. 4, the software information as a program source  $PS_2$  is input to the software supply section 32.

**[0028]** In the software supply section 32, the software data  $PS_2$  comprising a digital signal is band-compression coded by means of an MPEG encoder 33. The band-compression coded digital signal is input to a packet generation section 34 and a trick play processing

section 35. In the trick play processing section 35, variable-speed reproduction processing, i.e., processing for extracting an intra-coded (I) picture is performed for the video data. The extracted I picture is output to a multiplexer 36. Note that a technique for variable-speed reproducing an image which has been band-compression coded by an MPEG method is disclosed in Japanese Patent Application No. 287702/1993.

**[0029]** In the packet generation section 34, the input digital signal is packetized to video data, audio data, and other data. These packetized data are multiplexed by a multiplexer 36. In the multiplexer 36, an I picture is buried in the video data. A cipher of a storage system is put over the multiplexed digital signal by an encryption processing section 37, and the encrypted signal is sent to a multiplexer 4 of a rear sending section 31.

**[0030]** In the multiplexer 4, digital signals over which the ciphers of storage system were put are multiplexed. In an encryption processing section 5, a cipher of a broadcasting system is put over this multiplexed digital signal. Therefore, a cipher of a storage system and a cipher of a broadcasting system are put over the digital signal sent from the digital signal transmitting apparatus 30 in duplicate. In the sending section 31, key data that are added to programs are all common and broadcasting billing data is charge free.

**[0031]** This double security added digital signal is sent to a terminal installed in a household, i.e., a digital signal receiving apparatus 40 directly from a satellite 8 or by way of a signal distributing station 9 from the satellite 8, as shown in Fig. 5, where the same reference numerals are applied to corresponding parts with Fig. 2. In the digital signal receiving apparatus 40, the cipher of the broadcasting system, put over the transmitted digital signal, is decrypted by accessing a smart card 19, and the digital signal can be downloaded to a digital storage 41. That is, the cipher of the broadcasting system of the transmitted digital signal is decrypted by the decrypting section 15 and then the digital signal is recorded on the digital storage 41.

**[0032]** In this case, the digital signal which is downloaded to the digital storage 41 is recorded in the state where only the cipher of the storage system has been put over and also recorded in the state where variable-speed reproduction processing has been performed. Therefore, even if the key of the broadcasting system, added by the sending section 31, were changed, there would be no influence. Also, no image is viewed free of cost because the cipher of the storage system has been put over at point C of Fig. 5.

**[0033]** When a user desires to see the software information  $PS_2$  downloaded to the storage 41, a CPU 42 performs an inquiry of registration to an authorization center 44 (Fig. 4) for software information through a modem 43, by inputting an ID number registered independently of the broadcasting system (for example, on the screen of a personal computer, put an ID number). The CPU 42 usually performs an inquiry of registration to a

broadcasting-system authorization center 22 for the contract program  $PS_1$  and performs an inquiry of registration to the software-system authorization center 44 for the software information  $PS_2$ . That is, the CPU 42 constructs two independent billing systems, a billing system for a broadcasting system and a billing system for a software system, by controlling the share of the modem 43.

**[0034]** The authorization center 44 sends the ID number to the conditional access 45 (Fig. 4) of the software supply section 32 and confirms registration. If the authorization center 44 confirms registration, then bill processing is performed and the CPU 42 instructs a local conditional access 46 to decrypt a cipher. The local conditional access 46 has a function of decrypting the cipher of the software system. Hence, the reproduction limitation of the storage 41 is lifted and the cipher is decrypted, so that the user is able to see software information by the same manipulation as a normal video tape recorder (VTR).

## (2) Structure of Digital Signal Transmitting Apparatus according to an Embodiment

**[0035]** The detailed constructions of a sending section 31 and a software supply section 32 of a digital signal transmitting apparatus for use with an embodiment of the present invention are shown in Figs. 6 and 7, respectively. In this digital signal transmitting apparatus 30, when a normal contract program  $PS_1$  is supplied, the program source  $PS_1$  is input directly to the sending section 31, and when fee-charged software information  $PS_2$  is supplied, the fee-charged software information  $PS_2$  is supplied to the sending section 31 through the software supply section 32.

**[0036]** For the appreciation of the program  $PS_1$ , the video signal and the audio signal of a program, which is supplied, for example, from a digital VTR 47, are band-compression coded by means of MPEG encoders 2A and 2B and then are packetized for each video data and for each audio data by means of packet generation sections 3A and 3B. The packetized video data and audio data are sent to a multiplexer 4 via a data bus 48. At the same time as this, for example, a personal computer 49 (hereinafter referred to as a "PC") sends data other than video data and audio data to a packet generation section 3C through a data interface (data I/F) 50 to be packetized. The packetized data from the packet generation section 3C is then sent through the data bus 48 to the multiplexer 4.

**[0037]** Also, a conditional access 23 sends key data through a data I/F 51 to a packet generation section 3D to packetize it, and the packet key data from the packet generation section 3D is sent through the data bus 48 to the multiplexer 4. The conditional access 23 further sends key information for encrypting software data to an encryption processing section 5. In the multiplexer 4, the video data, the audio data, and other data are mul-

tiplexed. The encryption processing section 5 puts a cipher over this multiplexed data, based on the key information input from the conditional access 23. The encrypted data is error corrected by a FEC section 6. The error-corrected data is modulated by a modulator 7 and then transmitted to a satellite 8 via an up-converter 52.

**[0038]** When, on the other hand, fee-charged software information  $PS_2$  is transmitted, the video signal and the audio signal of the software information  $PS_2$  which is output, for example, from a digital VTR 53 are band-compression coded by means of MPEG encoders 33A and 33B, respectively. The band-compression coded video signal is input to a packet generation section 34A and a trick play processing section 35. The packet generation section 34A packetizes the input video signal. The trick play processing section 35 extracts an I picture from the input video signal and then outputs the I picture to a multiplexer 36.

**[0039]** The band-compression coded audio signal is input to a packet generation section 34B, which packetizes the audio signal. Also, general data other than video data and audio data, input from the PC 54, is input through a data I/F 55 to a packet generation section 34C. In addition, the conditional access 45 sends key data to a packet generation section 34D through a data I/F 56 and also sends key information for storage system to the encryption processing section 37.

**[0040]** The packetized data from the packet generation sections 34A to 34D are multiplexed by the multiplexer 36 through the data bus 57 and also the I picture is buried in video data. An encryption processing section 37 encrypts the multiplexed data, based on the key information input from the conditional access 45, and outputs the encrypted data to the packet generation section 3E of the sending section 31 through a data I/F 58 (Fig. 6). The packetized data from the packet generation section 3E is sent through the data bus 48 to the multiplexer 4 to be multiplexed, and then sent to the encryption processing section 5. In the encryption processing section 5, a cipher of the broadcasting system is put over the multiplexed data. The encrypted data is processed by the FEC section 6, the modulator 7, and the up-converter 52. The thus processed data is transmitted to the terminal 40 directly from the satellite 8 or by way of the signal distributing station 9 from the satellite 8.

## (3) Structure of Digital Signal Receiving Apparatus according to an Embodiment

**[0041]** As shown in Figs. 8 and 9 where the same reference numerals are applied to corresponding parts with Fig. 5, the digital signal receiving apparatus 40 according to an embodiment of the present invention is constituted by a receiving section 60 (Fig. 8) for receiving a digital signal which is sent by the digital signal transmitting apparatus 30 and a recording/reproducing section 61 (Fig. 9) for recording and reproducing the signal received by the receiving section 60 on and from a

recording medium. In this embodiment, the receiving section 60 and the recording/reproducing section 61 are interconnected by way of digital interfaces (digital I/F) 62 and 63.

[0042] In the receiving section 60, the digital signal which is transmitted directly from the satellite 8 or by way of the signal distributing station 9 from the satellite 8 is input to a tuner 12A as a compressed digital signal. The tuned digital signal is demodulated by a demodulator 12B and error corrected by an FEC section 12C. The error-corrected signal is then input to a decrypting block comprising a demultiplexer 14 and a decrypting section 15. In the decrypting block, the cipher of the broadcasting system is decrypted with a private key which only a registered user can have.

[0043] The general data where the cipher of the broadcasting system was decrypted and the video data where a plurality of program channels were time-division multiplexed at units of packet of predetermined byte length are sent to a packet separation section 16 or the recording/reproducing section 61. A path leading to the packet separation section 16 and a path leading to the recording/reproducing section 61 are switched by switching means (not shown). In this embodiment, the switching means has been switched to the recording/reproducing section 61. The general data used herein includes text data, font data, video data, graphic data, and moving picture video data for administering a user's interface on a TV monitor.

[0044] The general data is input through a data port to a CPU block 64 which performs interactive processing. The CPU block 64 comprises a main CPU 42, an electrically erasable programmable read only memory (EEPROM) 65, a modem interface (modem I/F) 66, a modem 43, a video random access memory (VRAM) 67, a graphic processor unit (GPU) 68, a read only memory (ROM) 69, and a dynamic random access memory (DRAM) 70. In the case of hard-disk incorporated systems, general data is stored through a CPU bus in a hard disk once. The CPU 42 processes these general data in accordance with instructions externally manipulated by a controller, and necessary display data is output.

[0045] On the other hand, the video data is input through the digital I/F 62 and the digital I/F 63 to the recording/reproducing section 61 and then the video data is packetized and separated by a packet separation section 71. The packetized separated data is given time base corrector (TBC) processing and the format is converted by a format converting section 72. The format converted data is error corrected and modulated by way of a local conditional access 46. The modulated data is then recorded on the recording medium of a mechanical deck 74 by means of a record/reproduction processing section 73. Note that both of tapes and disks can be used as a recording medium. For example, there are digital VCRs, digital video disks (DVD), hard disks, and mini-floppy disks.

[0046] If a user instructs reproduction, a command is

input from the CPU 42 through the digital I/F 62 and the digital I/F 63 to a VCR controller 75. The VCR controller 75, based on this command, drives the mechanical deck 74 by a driver 76. Thereby, a search is made up to a desired absolute address on the recording medium and a tracking operation is performed by an automatic tracking following (ATF) 77. As a result, data, recorded on the recording medium, is reproduced by the record/reproduction processing section 73. Note that the absolute address may be added in advance to transmission data, or may be added within the digital signal receiving apparatus 40.

[0047] The reproduction signal, reproduced by the record/reproduction processing section 73, is demodulated and then the cipher of the storage system is decrypted by the local conditional access 46. The decrypted reproduction signal is error corrected and the format is converted by the format converting section 72. The format converted reproduction signal is packetized by the packet generation section 78 and is sent through the digital I/F 63 and the digital I/F 62 to the packet separation section 16, in which the packet is separated. For the packet separated reproduction signal, the compression of the audio signal and the compression of the video signal are decompressed by an MPEG audio decoder 17A and an MPEG image decoder 17B, respectively.

[0048] The decompressed audio signal is converted to an analog signal by a digital-to-analog converter (DAC) 79 and is output. The decompressed video signal is encoded by a national television system committee (NTSC) encoder 80. Also, general data on a user interface is input from the CPU block 64 to an NTSC encoder 81. The general data, encoded with the aforementioned encoder 81, is added to the video signal which is output from the encoder 80, and the general data is output.

[0049] In a case where in the foregoing structure the software information  $PS_2$  is transmitted to the digital signal receiving apparatus 40, in the software supply section 31, a cipher of a software system is put over the software information  $PS_2$  and then in the sending section 32 a cipher of a broadcasting system is put over, and with this double security ensured, the software information is transmitted to the digital signal receiving apparatus 40. In the digital signal receiving apparatus 40, the cipher of the broadcasting system is decrypted and then the software information  $PS_2$  is recorded on the digital storage 41. When a user sees the software information  $PS_2$  recorded on the digital storage 41, registration is confirmed by the authorization center 44. If registration is confirmed, the cipher of the software system is decrypted and the software information  $PS_2$  can be seen.

[0050] According to the foregoing structure, the key data of the broadcasting system are rendered all common and also the billing data by broadcasting is rendered free, and the software information  $PS_2$  over which a cipher of the broadcasting system and a cipher of the software system are put in duplicate is transmitted when

the software information  $PS_2$  is supplied to the digital signal receiving apparatus 40. In the digital signal receiving apparatus 40, the cipher of the broadcasting system is decrypted and then the software information  $PS_2$  is downloaded on the digital storage 41. Therefore, security can be ensured because the cipher of the software system has been put over the software information  $PS_2$  when downloading the software information  $PS_2$  to the digital storage 41.

[0051] Also, according to the above-mentioned structure, the switching means, which switches the path leading to the packet separation section 16 and the path leading to the recording/reproducing section 61, is provided, so that a digital signal transmitting system having both of the advantages of a video on demand and the advantages of a VTR can be provided to contract users.

[0052] Also, according to the above-mentioned structure, the software information  $PS_2$  is given variable-speed reproduction processing in the software supply section 32 and then transmitted to the digital signal receiving apparatus 40, so that contract users are able to reproduce the software information  $PS_2$  recorded on the storage 41 at variable speed.

[0053] Also, according to the above-mentioned structure, users are able to see, among a plurality of pieces of software information  $PS_2$  downloaded, only desired software information at a desired time because a plurality of pieces of fee-charged software information  $PS_2$  can be downloaded to the storage 41 of the terminal 40 by making use of an unoccupied time band of a transmission path and an unoccupied transmission path. In other words, each time software information  $PS_2$  desired is selected, bill processing is performed and the reproduction limitation of the storage 41 is lifted. This embodiment is also effective as a means for realizing the video on demand in a digital signal transmitting system which is not 1:1 as in the case of transmission by satellite.

[0054] Also, according to the above-mentioned structure, the switching between the access to the authorization center 22 managing the billing information on the normal contract programs  $PS_1$  and the access to the authorization center 44 managing the billing information on the software information  $PS_2$  is controlled by way of the modem 43, so that two independent billing systems, a billing system for a broadcasting system and a billing system for a software system, can be constructed.

#### (4) Structure of Digital Signal Transmitting System

[0055] In Fig. 10 where the same reference numerals are applied to corresponding parts with Figs. 4 and 5, reference numeral 90 denotes the schematic construction of a digital signal transmitting system for use with another embodiment of the present invention. In the digital signal transmitting system 90, twofold security is ensured when predetermined services, for example, fee-charged software information  $PS_2$  is transmitted, by

putting a cipher of the storage system over the software information  $PS_2$  and further putting a cipher of the broadcasting system over that software information  $PS_2$ . Moreover, an encryption key  $K_m$ , which is used when the cipher of the storage system is put over, is encrypted with a personal key  $K_{p2}$  for software information use.

[0056] When a user sees the program source  $PS_1$  transmitted by the digital signal transmitting apparatus 30, the user inserts the smart card 19 mailed from the broadcasting station 30 into the terminal 40 and inputs a registered ID number of broadcasting system, ID1. Hence, the CPU 42 performs an inquiry of registration to the authorization center 22 through the modem 43. If the registration of that user is confirmed, a program source  $Es$  (Data) over which a cipher of the broadcasting system was put is sent from the broadcasting station, i.e., the digital signal transmitting apparatus 30.

[0057] That is, in the broadcasting station 30, when the program source  $PS_1$  is transmitted to the digital signal receiving apparatus 40, in the encryption processing section 5, a cipher of the broadcasting system is put over the program source  $PS_1$  by means of an encryption key  $K_s$ . This encryption key  $K_s$  is encrypted with a work key  $K_w$ , and the work key  $K_w$  is encrypted with a personal key  $K_{p1}$  of broadcasting system given to each user. Therefore, the encryption processing section 5 multiplexes the program source  $Es$  (Data) over which a cipher of the broadcasting system was put, and the encryption key  $E(K_s)$  and the work key  $E(K_w)$ , and transmits the multiplexed data to the digital signal receiving apparatus 40.

[0058] The smart card 19 includes the personal key  $K_{p1}$  which was used when encrypting the encryption key  $K_m$ . Therefore, in the terminal 40, the cipher of the encrypted work key  $E(K_w)$  is decrypted by the personal key  $K_{p1}$  and the cipher of the encryption key  $E(K_s)$  is decrypted by the decrypted work key  $K_w$ . Moreover, with the decrypted encryption key  $K_s$ , the cipher of the broadcasting system of the program source  $Es$  (Data) is decrypted. The decrypted program source  $PS_1$  is decompressed by the MPEG decoder 17 and converted to an analog signal. The converted analog signal is output to a TV set.

[0059] When a user desires to download the software information  $PS_2$  to the digital storage 41 (in this case, the above-mentioned switching means switches each time information is sent to the digital storage 41), the user inserts the smart card 19 into the terminal 40 and inputs a registered ID number of broadcasting system, ID1. Therefore, the CPU 42 performs an inquiry of registration to the authorization center 22 through the modem 43. If the registration of that user is confirmed, a program source  $Es$  { $Em$ (Data)} over which a cipher of the broadcasting system and a cipher of the software system were put is sent from the broadcasting station 30.

[0060] That is, in the encryption processing section 37

of the broadcasting station 30, a cipher of the storage system is put over the software information  $PS_2$  by means of an encryption key  $K_m$  for software information use. Also, this encryption key  $K_m$  is encrypted with a personal key  $K_{p2}$  for software information use, given to each user. The encrypted software data  $Em(Data)$  is sent to the encryption processing section 5, and the encrypted encryption key  $E(K_m)$  is sent to the authorization center 44.

[0061] In the encryption processing section 5, a cipher of the broadcasting system is put over the software data  $Em(Data)$  over which a cipher of the software system was put, by means of the encryption key  $K_s$ . As described above, this encryption key  $K_s$  is encrypted with the work key  $K_w$ , and the work key  $K_w$  is encrypted with the personal key  $K_{p1}$ . The encryption processing section 5 multiplexes the software data  $Es\{Em(Data)\}$  over which the cipher of the software system and the cipher of the broadcasting system were put in duplicate, and the encryption key  $E(K_s)$  and the work key  $E(K_w)$ , and transmits the multiplexed data to the terminal 40.

[0062] In the terminal 40, the cipher of the broadcasting system of the doubly encrypted software data  $Es\{Em(Data)\}$  as described above is decrypted because the smart card 19 has been inserted in the terminal 40. The software data  $Em(Data)$  where the cipher of the broadcasting system was decrypted is recorded on the digital storage 41.

[0063] When a user sees the software data  $Em(Data)$  recorded on the digital storage 41, the user inserts the smart card 19 into the terminal 40 and inputs a registered ID number of software system, ID2. Thereby, the CPU 42 performs an inquiry of registration to the authorization center 44 through the modem 43. If the registration of the user is confirmed, bill processing is performed. Then, the encryption key  $E(K_m)$  is input from the authorization center 44 through, for example, a telephone line and through the modem 43 to a smart card 91, and the cipher of the encryption key  $E(K_m)$  is decrypted.

[0064] That is, the smart card 91 includes the personal key  $K_{p2}$  which was used when encrypting the encryption key  $K_m$  of software system. Therefore, the cipher of the encryption key  $E(K_m)$  is decrypted by the personal key  $K_{p2}$ . The decrypted encryption key  $K_m$  is sent through the CPU 42 to the decryption section 46.

[0065] In the decrypting section 46, the cipher of the software system, put over the software data  $Em(data)$ , is decrypted by the encryption key  $K_m$ , and the decrypted software data is sent to an MPEG decoder 17. In the MPEG decoder 17, the decrypted software data  $PS_2$  is decompressed and then converted to an analog signal. The analog signal is then output to a TV set.

[0066] In the foregoing structure, when the software information  $PS_2$  is transmitted to the digital signal receiving apparatus 40, a cipher of the software system is put over the software information  $PS_2$  and then a cipher of the broadcasting system is put over and transmitted,

and at the same time the encryption key  $K_m$ , which was used when the cipher of the software system is put over, is encrypted with the personal key  $K_{p2}$ .

[0067] In the digital signal receiving apparatus 40, the cipher of the broadcasting system of the software data  $Es\{Em(Data)\}$  is decrypted with the smart card 19 and then the decrypted software data is recorded on the digital storage 41. When the software data  $Em(Data)$ , recorded on the digital storage 41, is seen, the cipher of the encryption key  $E(K_m)$  is decrypted with the smart card 91. Also, the cipher of the software system, put over the software data  $Em(Data)$ , is decrypted with the decrypted encryption key  $K_m$ .

[0068] According to the foregoing structure, when transmitting the software information  $PS_2$  is transmitted to the digital signal receiving apparatus 40, a cipher of the software system and a cipher of the broadcasting system are put over the software information  $PS_2$ , and the encryption key  $K_m$ , used when the cipher of the software system is put over, is encrypted with the personal key  $K_{p2}$ . Therefore, the security of the software information  $PS_2$  can be ensured more firmly.

[0069] Also, according to the above-mentioned structure, by incorporating the personal key  $K_{p2}$  for decrypting the cipher of the encrypted encryption key  $E(K_m)$  into the smart card 91, desired software information  $PS_2$  can be seen at a desired time because users are able to decrypt with ease and reliability the cipher of the encryption key  $E(K_m)$ .

#### (5) Other Embodiment

[0070] The above-mentioned embodiments have been dealt with the case where a contract user has downloaded free-charged software information  $PS_2$  to the storage 41 and where the user sees the software information  $PS_2$  recorded on the digital storage 41 when the user desires to do so. However, the present invention is not limited to this, but as shown in Fig. 11, a package system 100 can be constructed with a software supply section 32 and a digital signal receiving apparatus 40, software information encrypted in the software supply section 32 is recorded on a recording medium and packaged, and this package software 101 can be sent to users periodically, for example, by the month.

[0071] In this case, as shown in Fig. 11, a billing system can be constructed only with the digital signal receiving apparatus 40. Also, by cheaply providing users with the software package 101 where a plurality of pieces of encrypted software information are recorded, there can be constructed a new software information supply system where pieces of software information are packaged, such as a system where only information that users desire to see is billed and enjoyed. Note that the package software 101 includes, for example, ten movies.

[0072] Further, the above-mentioned embodiments have been dealt with the case where the authorization



center 22 for a broadcasting system and the authorization center 44 for a software system are provided and the share of the modem 43 is controlled by means of the CPU 42, so that two independent billing systems are constructed. However, the present invention is not limited to this, but the bill processing with respect to the programs of the broadcasting and software systems can be performed with a single authorization center.

[0073] Further, the above-mentioned embodiment have been dealt with the case that there was used the digital signal receiving apparatus 40 where the recording/reproducing section 61 is connected to the receiving section 60. However, the present invention is not limited to this, but it can use a digital signal receiving apparatus 40 into which the recording/reproducing section 61 is incorporated.

[0074] Further, the above-mentioned embodiment have been dealt with the case where variable-speed reproduction processing was performed in the software supply section 32. However, the present invention is not limited to this, but the variable-speed reproduction processing can be performed in the terminal, i.e., digital signal receiving apparatus 40.

[0075] Furthermore, the above-mentioned embodiment have been dealt with the case where the smart card 19 for seeing a general contract program source  $PS_1$  and the smart card 91 for seeing software information  $PS_2$  were individually provided. However, the present invention is not limited to this, but a single card can have both of the functions of the smart card 19 and the smart card 91.

[0076] Moreover, the above-mentioned embodiment have been dealt with the case where the software information  $PS_2$  was downloaded to the digital storage 41. However, the present invention is not limited to this, but the software information  $PS_2$  can be seen at real time. In such a case, the switching means is switched to the path leading to the packet separation section 16 and the smart cards 19 and 91 are inserted into the terminal 40. Therefore, the ciphers of broadcasting and software systems which have been put over the software information  $PS_2$  are decrypted, and the software information  $PS_2$  can be seen at real time.

[0077] Finally, the above-mentioned embodiment have been dealt with the case where an audio signal and an video signal are band-compression encoded and then transmitted to the digital signal receiving apparatus 40. However, the present invention is not limited to this, but only the video signal can be band-compression encoded and transmitted to the digital signal receiving apparatus 40.

[0078] While there has been described in connection with the preferred embodiments of the invention, it will be obvious to those skilled in the art that various changes and modifications may be aimed, therefore, to cover in the appended claims all such changes and modifications as fall within the true scope of the invention.

[0079] Accordingly, it will be appreciated that an as-

pect of the present invention includes a digital signal transmitting method where at least a band-compression coded digital video signal may be given encryption processing and transmitted, wherein

when an image providing predetermined services is transmitted, said band-compression coded digital signal maybe given first-encryption processing and then the first-encryption processed digital signal may be further given said encryption processing and transmitted.

[0080] The band-compression coded and first-encryption processed digital signal may be mixed with a digital signal where said band-compression encoding may have been completed with a predetermined image unit, and the mixed signal may be given said encryption processing and transmitted.

[0081] A first encryption key, which is used when giving said first-encryption processing to said band-compression coded signal, may be encrypted with a second encryption key.

[0082] According to a further aspect of the invention, at least a band-compression coded digital video signal may be given encryption processing and transmitted, wherein

said band-compression coded and encryption processed digital signal may be mixed with a digital signal where said band-compression encoding may have been completed within a predetermined image unit to be transmitted.

[0083] It will be appreciated that a further aspect of the invention may provide a digital signal receiving apparatus for receiving at least a band-compression coded digital video signal over which a first cipher may be put and then a second cipher may be put and which may be transmitted by a broadcasting station, comprising:

second-decryption means for decrypting said second cipher put over said digital signal;

recording/reproducing means for recording said digital signal, where said second cipher was decrypted, on a recording medium, and also for reproducing said digital signal recorded on said recording medium; and

first-decryption means for decrypting said first cipher of a reproduction signal that is reproduced from said recording medium.

[0084] The first decrypting means may include key decryption means decrypting a cipher put over an encryption key which may be used when putting said first cipher over said band-compression digital signal, and wherein

a cipher, put over said encryption key, may be decrypted by said decryption means, and the first cipher of said reproduction signal may be decrypted with the decrypted encryption key.

[0085] The broadcasting station may mix said band-compression coded digital signal where the first cipher was put over and a digital signal where the band-com-

pression encoding has been completed within a predetermined image unit, then put a second cipher over the mixed signal, and may transmit it; and

said recording/reproducing means may record said digital signal over which the first cipher was put and also records said digital signal where the band-compression encoding may have been completed at a predetermined image unit, and at the time of variable-speed reproduction, may output a variable-speed reproduction image by means of said digital signal where the band-compression encoding has been completed at a predetermined image unit.

[0086] According to a further aspect, embodiments of the invention may provide a digital signal receiving apparatus which may have a modem and, by controlling, by means of said modem, switching of an access to a plurality of management stations managing billing information, constructs a billing system, of said plurality of management stations. According to a further aspect, embodiments of the invention may provide a recording medium wherein at least a band-compression coded digital video signal may have been encrypted and recorded.

#### Claims

1. A method of transmitting a digital signal, the method comprising the steps of:

compressing (33, 2) a first digital signal (PS2) and a second digital signal (PS1);  
 encrypting (37) said compressed first digital signal with a first encryption key (Km);  
 multiplexing (4) the encrypted compressed first digital signal and compressed second digital signal;  
 encrypting (5) the multiplexed first and second digital signals with a second encryption key (Ks);  
 receiving (44) an inquiry to reproduce said first digital signal stored on a recording medium of a receiver (40, 60, 61);  
 confirming (44, 45) registration of a subscriber who owns said receiver in response to said inquiry;  
 performing (45) a billing processing if said registration is confirmed;  
 and  
 transmitting (44) said first encryption key (Km) to said receiver (40, 60, 61) after said billing processing is performed.

2. A method according to Claim 1, further comprising:

encrypting (30) said second encryption key (Ks);  
 wherein said multiplexing step multiplexes said

first digital signal, second digital signal and said encrypted second encryption key (E(Ks)).

3. A method according to Claim 1, further comprising:

encrypting (30) said first encryption key (Km);  
 wherein said transmitting step transmits said encrypted first encryption key (E(Km)) to said receiver (40, 60, 61).

4. A method according to Claim 1, wherein said receiving step receives said inquiry via telephone line.

5. A method according to Claim 4, wherein said transmitting step transmits said encryption key (Km) via telephone line.

6. A method according to any of claims 1 to 5, wherein each respective first and second digital signal defines an image.

7. Apparatus (30) for transmitting a digital signal, the apparatus comprising:

means (33, 2) for compressing a first digital signal (PS2) and a second digital signal (PS1);  
 means (37) for encrypting said compressed first digital signal with a first encryption key (Km);  
 means (4) for multiplexing the encrypted compressed first digital signal and compressed second digital signal;  
 means (5) for encrypting the multiplexed first and second digital signals with a second encryption key (Ks);  
 means (44) for receiving an inquiry to reproduce said first digital signal stored on a recording medium of a receiver (40, 60, 61);  
 means (44, 45) for confirming registration of a subscriber who owns said receiver in response to said inquiry;  
 means (45) for performing a billing processing if said registration is confirmed; and  
 means (44) for transmitting said first encryption key (Km) to said receiver (40, 60, 61) after said billing processing is performed.

8. Apparatus according to Claim 7, further comprising:

means (30) for encrypting said second encryption key (Ks);  
 wherein said multiplexing means multiplexes said first digital signal, second digital signal and said encryption key (E(Ks)).

9. Apparatus according to Claim 7, further comprising:

means (30) for encrypting said first encryption

key (Km);  
wherein said transmitting means transmits said  
encrypted first encryption key (E(Km)) to said  
receiver (40, 60, 61).

10. Apparatus according to Claim 7, wherein said re-  
ceiving means receives said inquiry via telephone  
line. 5
11. Apparatus according to Claim 10, wherein said  
transmitting means transmits said first encryption  
key (Km) via telephone line. 10
12. Apparatus according to any of claims 7 to 11, where-  
in each respective first and second digital signal de- 15  
fines an image.

20

25

30

35

40

45

50

55

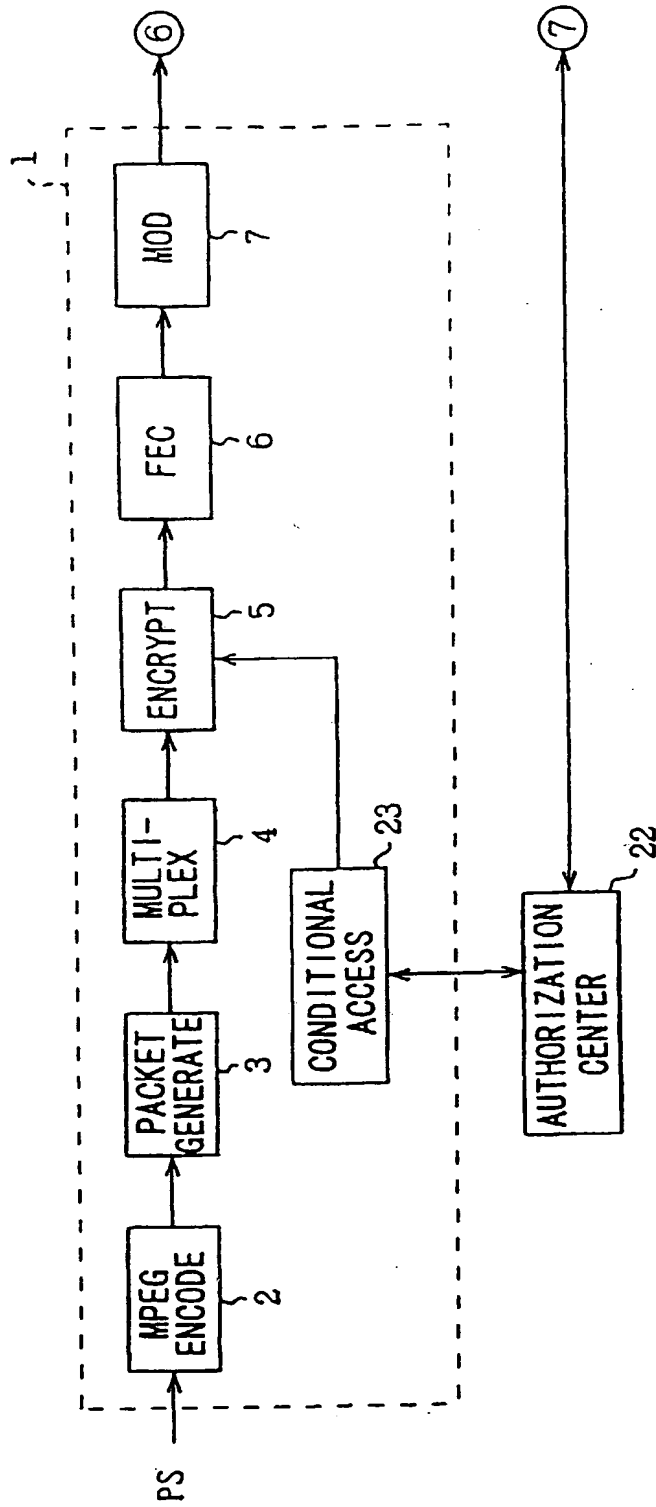


FIG. 1

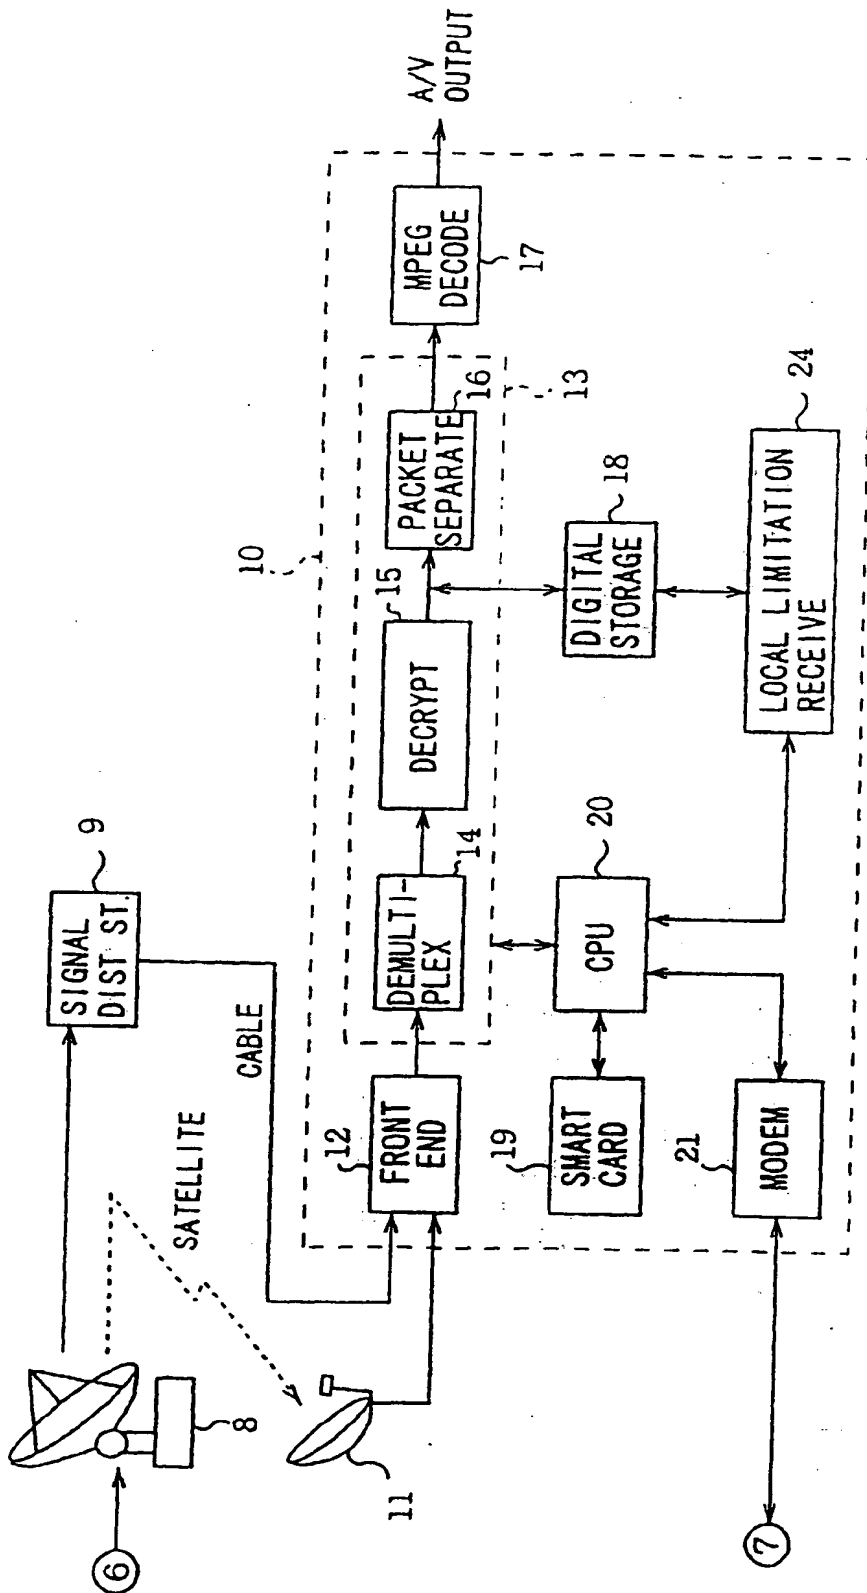


FIG. 2

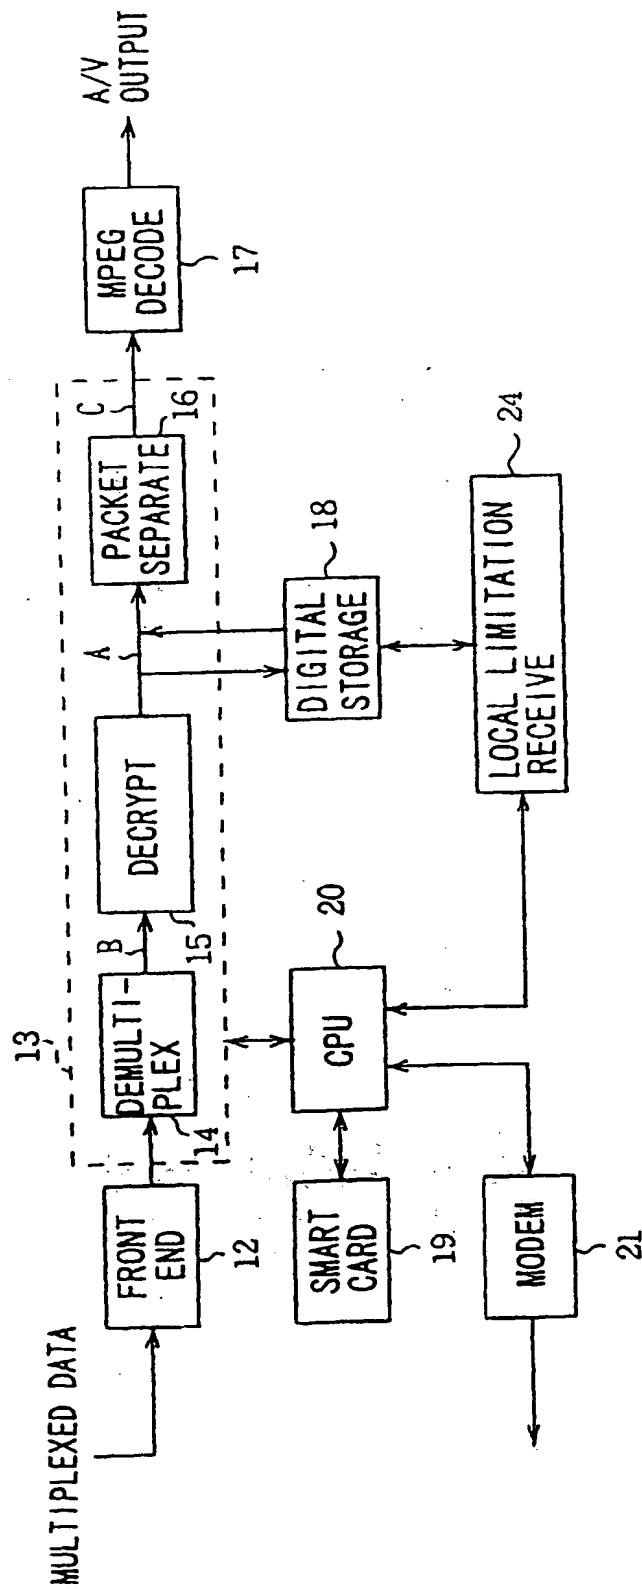


FIG. 3

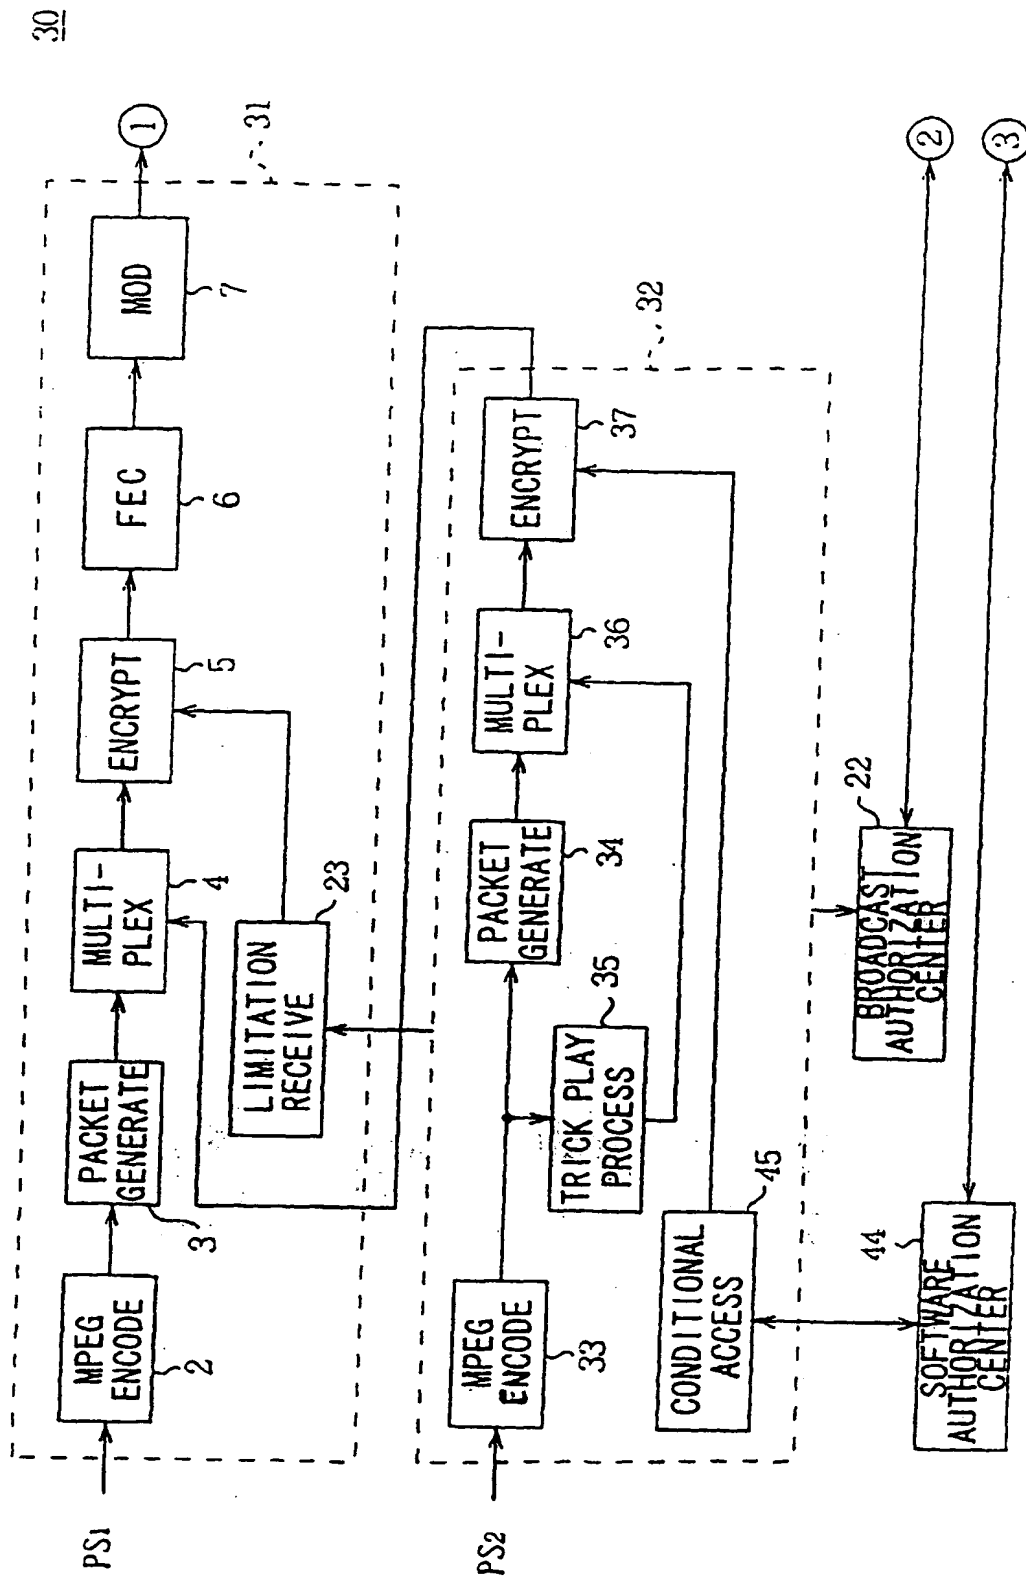


FIG. 4

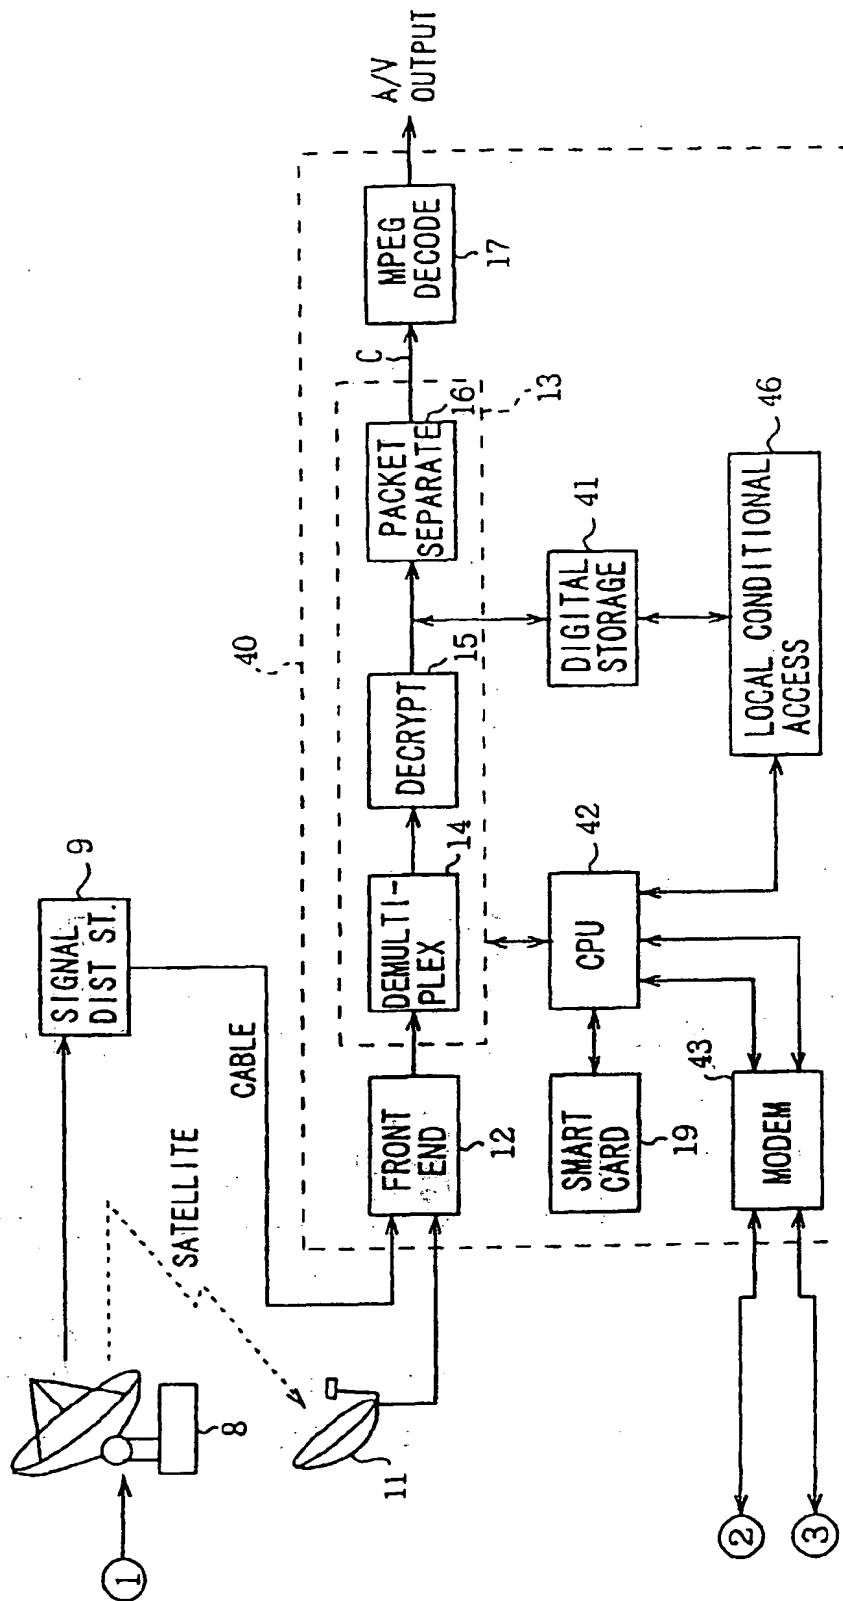


FIG. 5



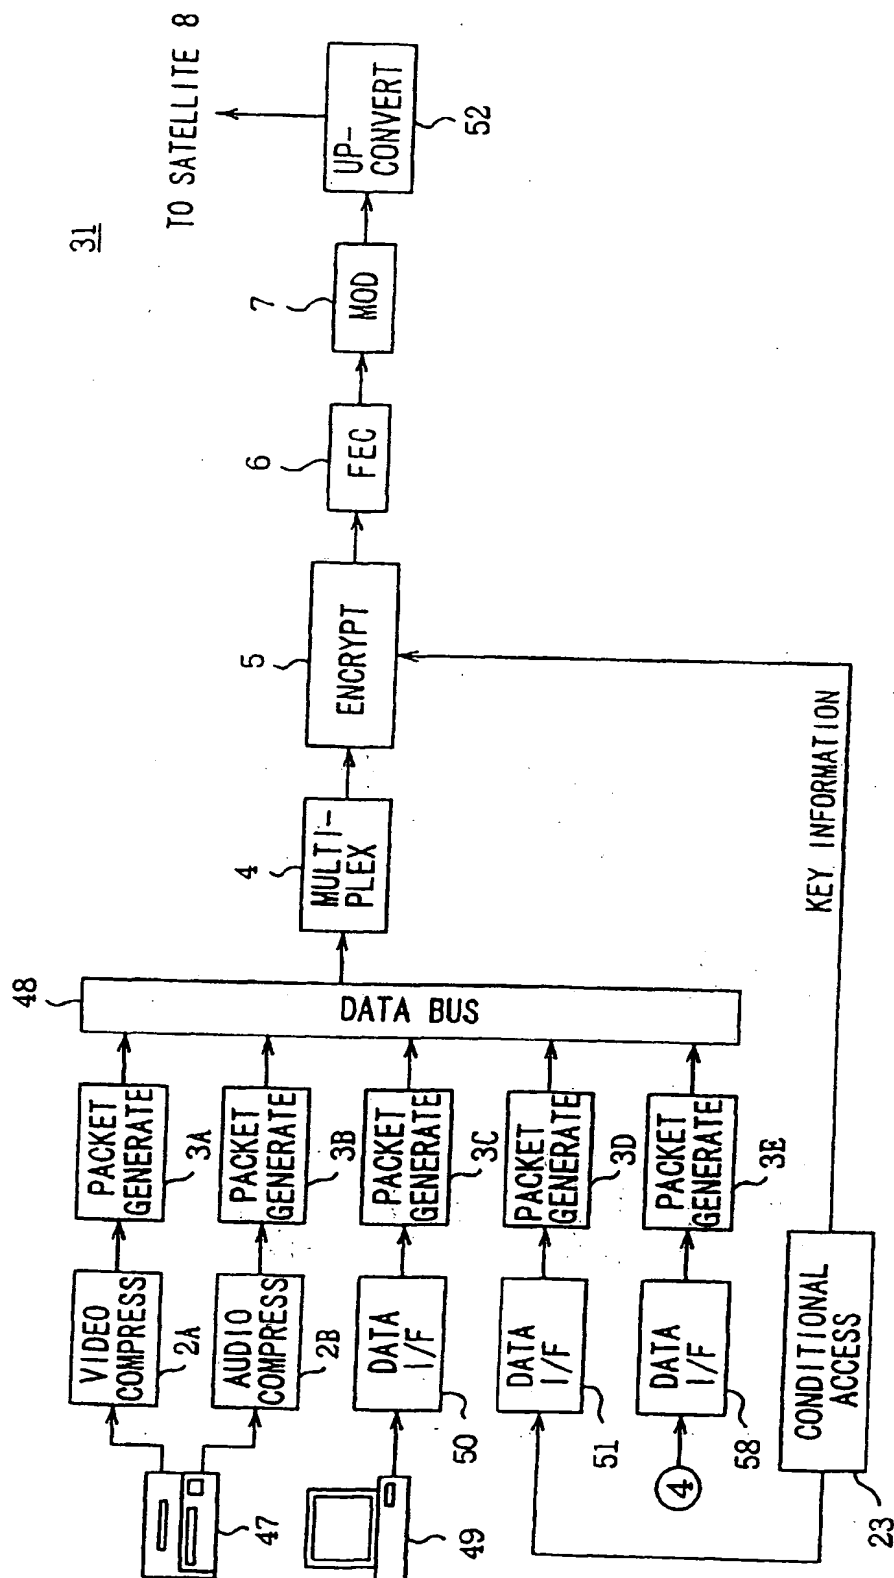


FIG. 6

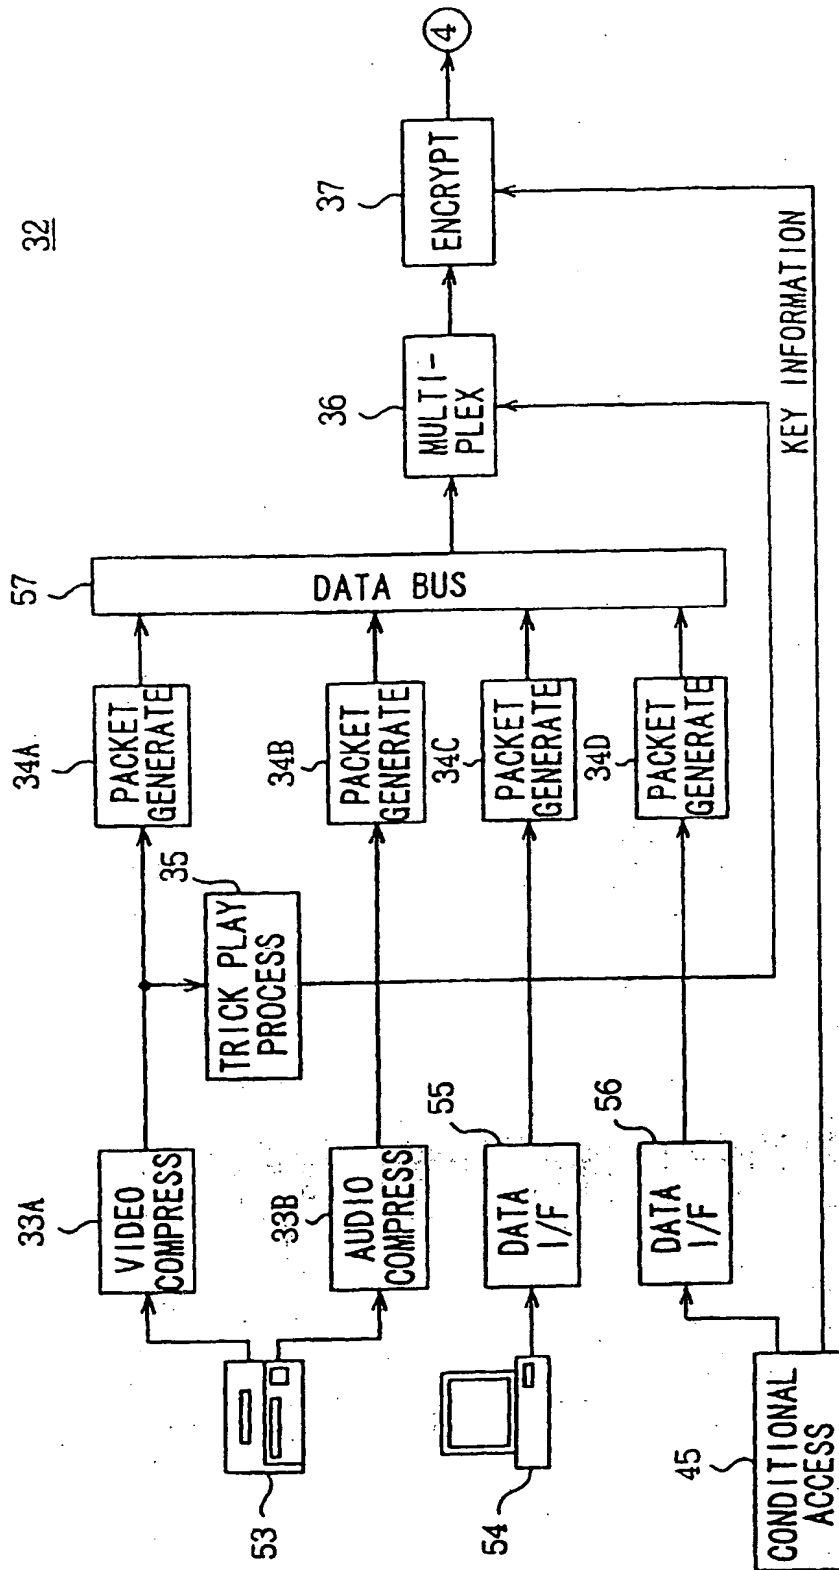


FIG. 7

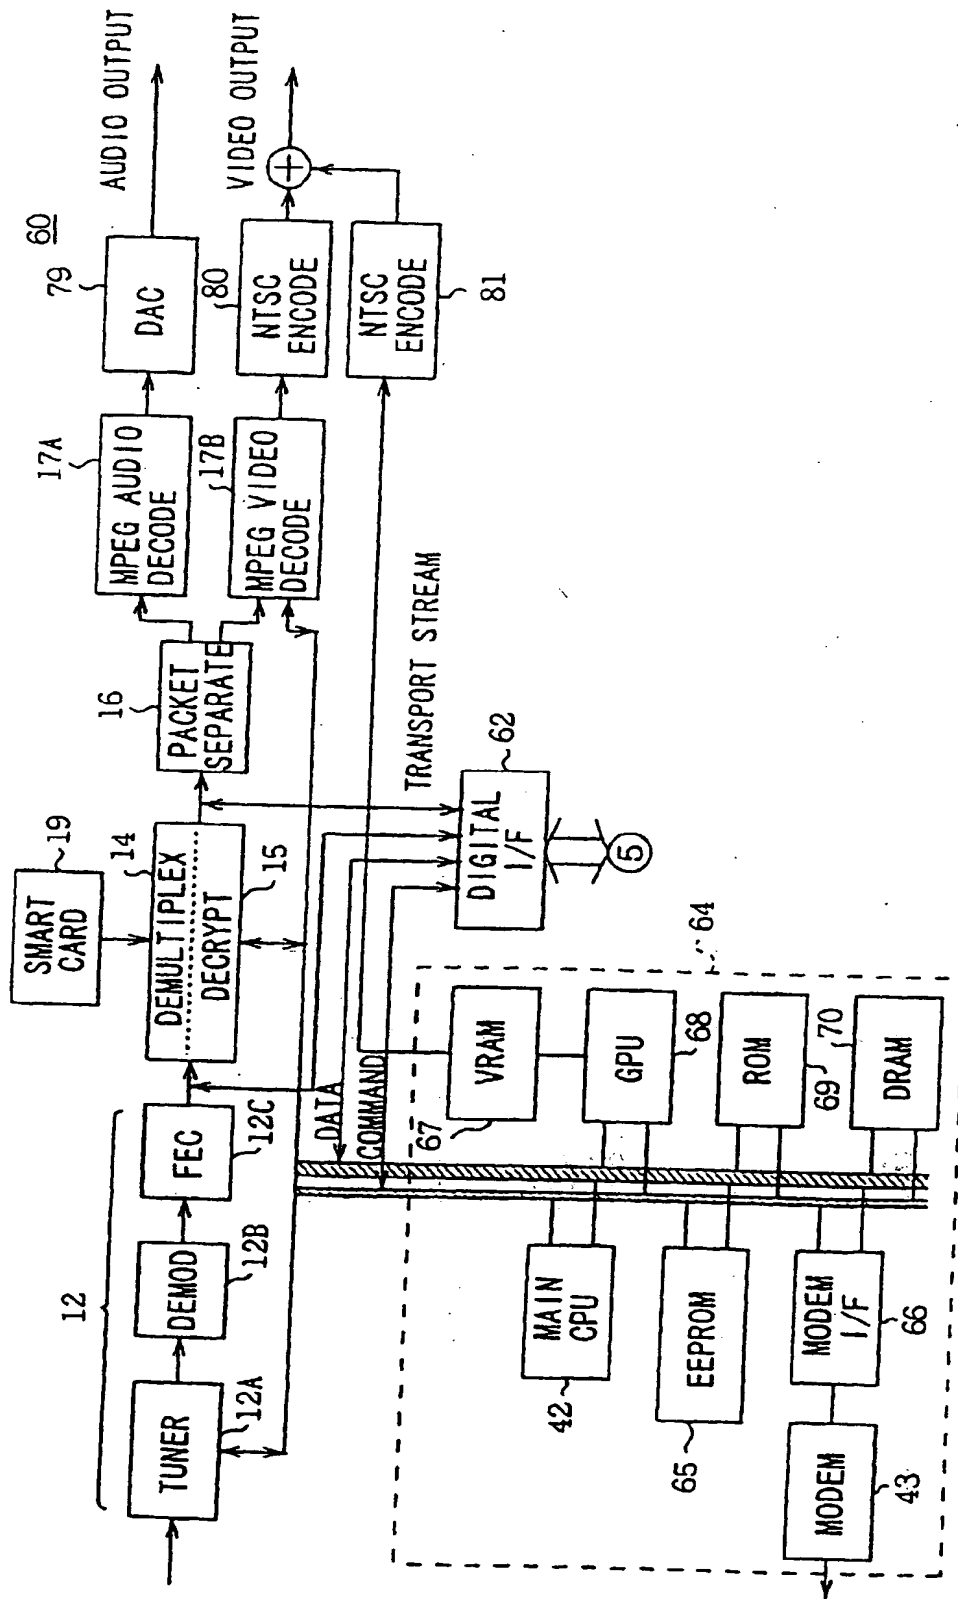


FIG. 8

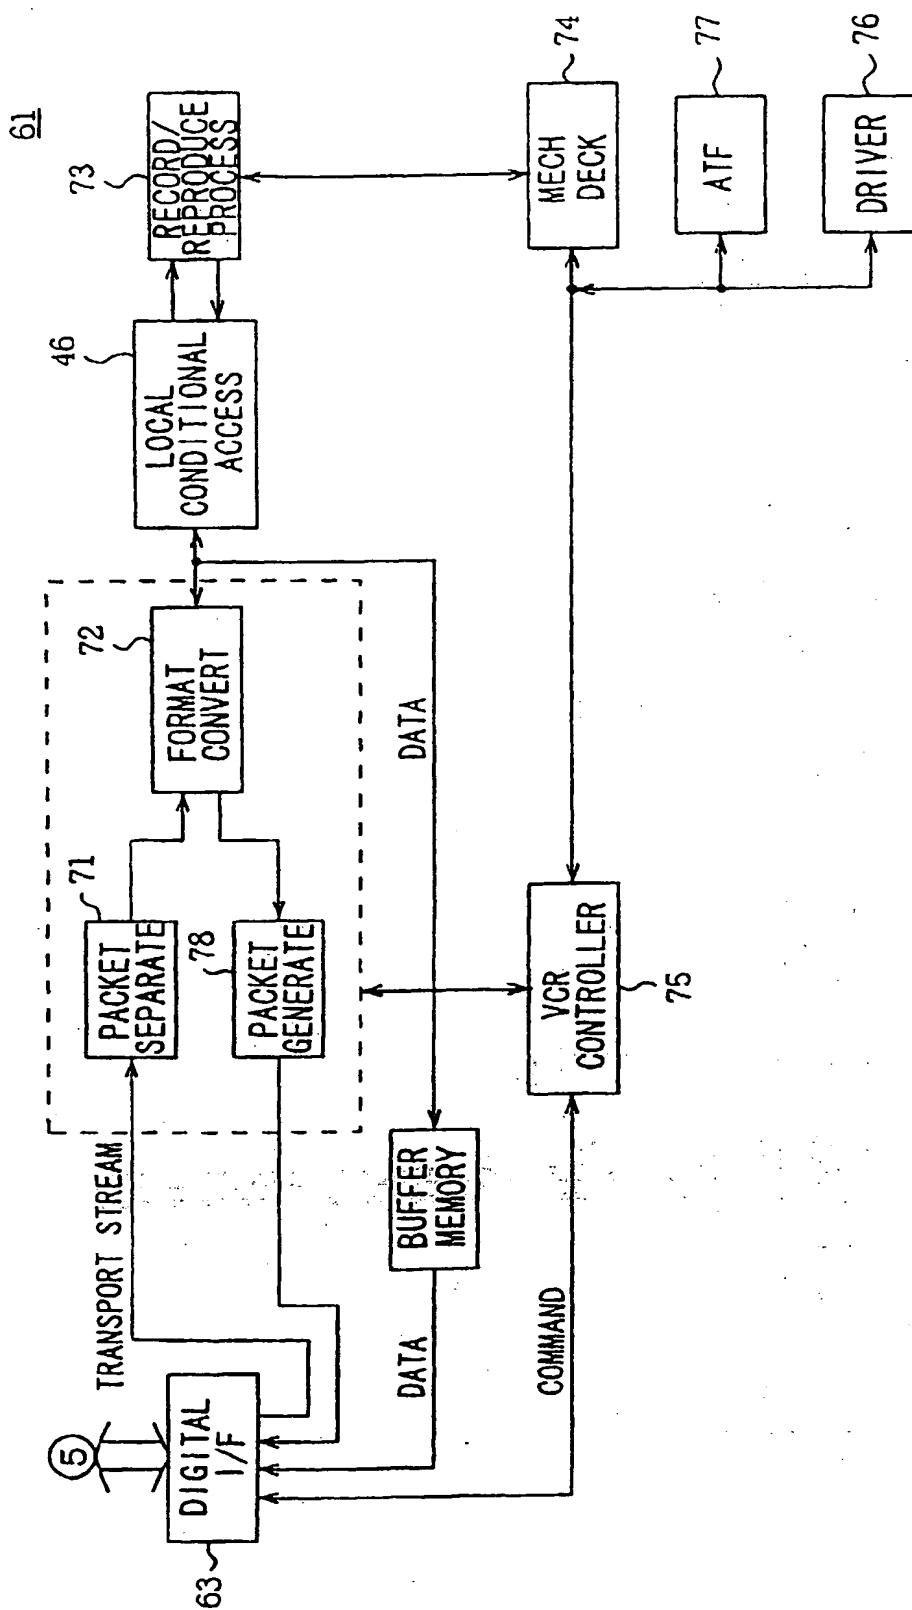


FIG. 9

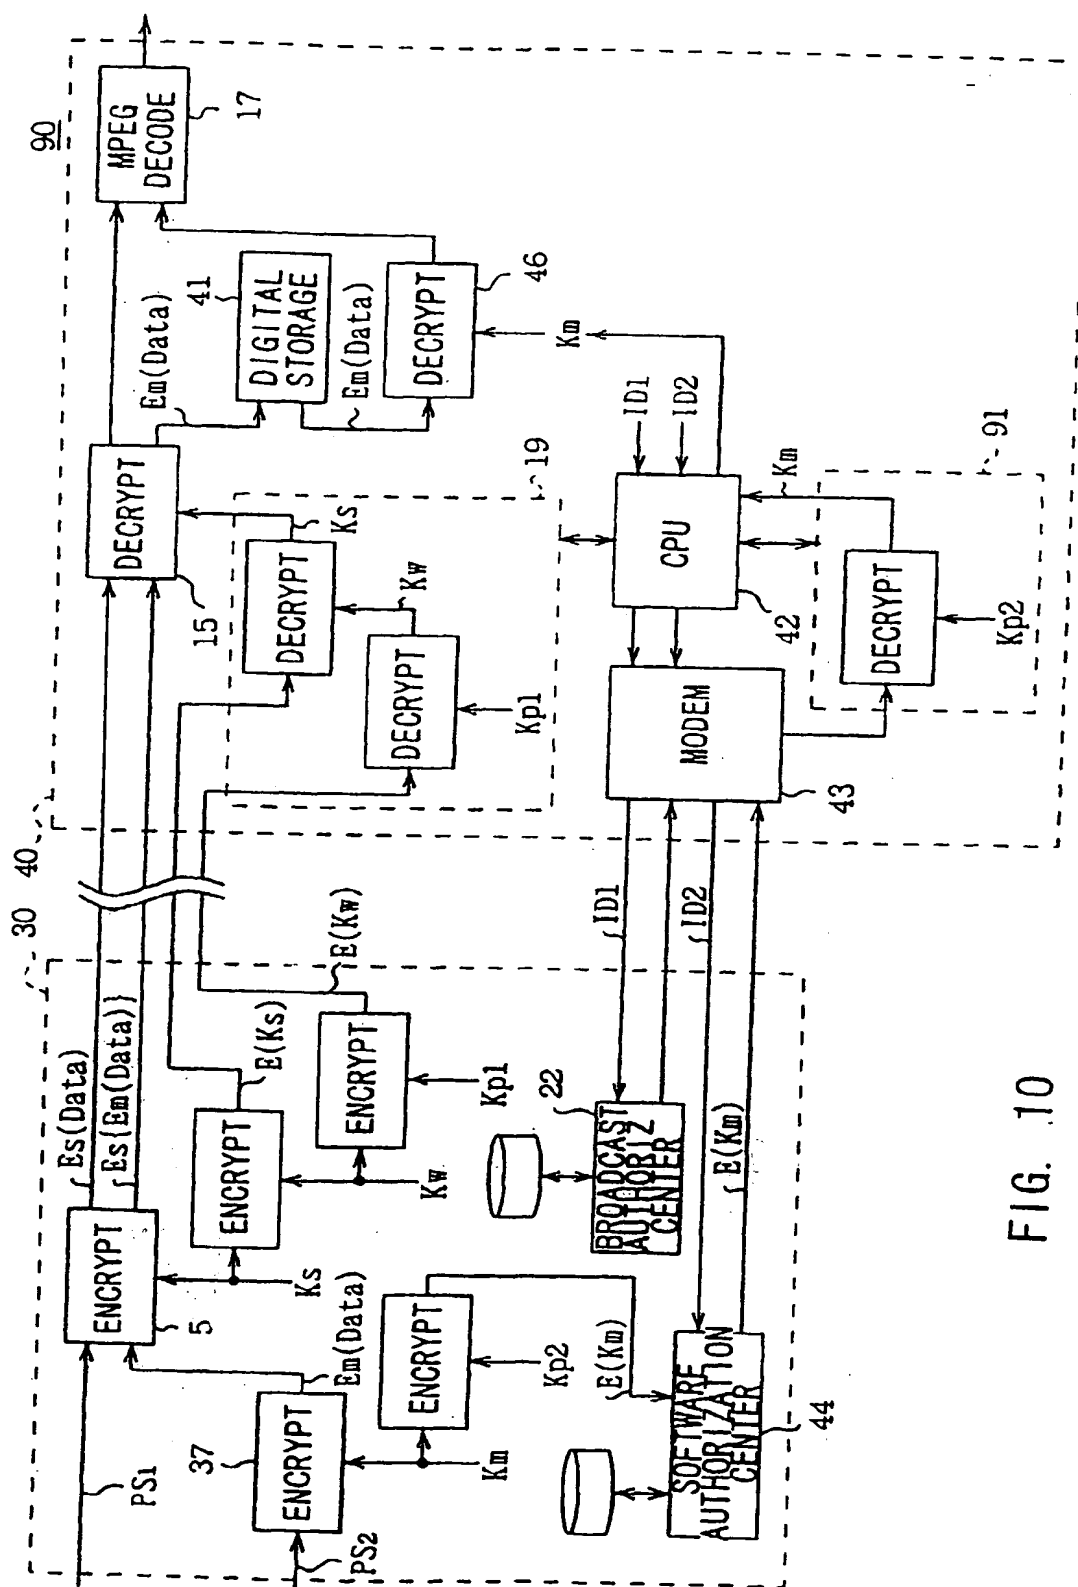


FIG. 10


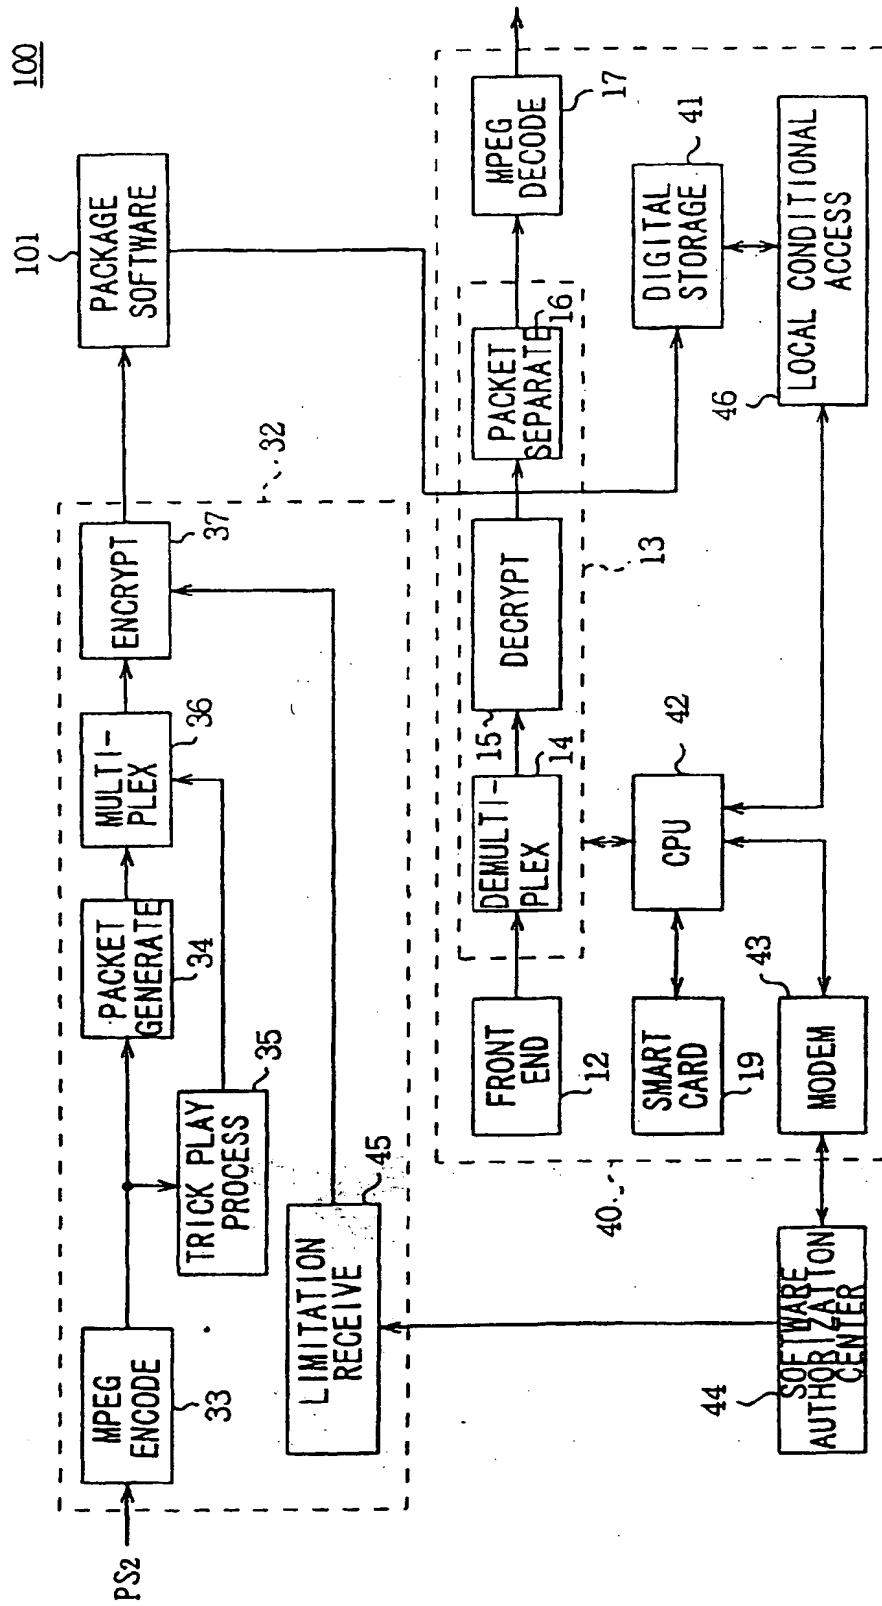


FIG. 11



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 996 288 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
20.12.2000 Bulletin 2000/51

(51) Int Cl.7: H04N 7/167

(43) Date of publication A2:  
26.04.2000 Bulletin 2000/17

(21) Application number: 00200089.1

(22) Date of filing: 27.10.1995

(84) Designated Contracting States:  
DE FR GB  
Designated Extension States:  
LT LV SI

(30) Priority: 28.10.1994 JP 28913994  
25.01.1995 JP 3005695

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
95307676.7 / 0 710 025

(71) Applicant: SONY CORPORATION  
Tokyo 141 (JP)

(72) Inventors:  
• Kubota, Yukio  
Shinagawa-ku, Tokyo 141 (JP)  
• Goto, Koichi  
Shinagawa-ku, Tokyo 141 (JP)

(74) Representative: DeVile, Jonathan Mark et al  
D. Young & Co.,  
21 New Fetter Lane  
London EC4A 1DA (GB)

(54) Digital signal transmitting methods, digital signal receiving apparatus, and recording media

(57) A digital signal transmitting method, a digital signal receiving apparatus (40), and a recording medium (101) ensure the security of fee-charged software information. When an image providing predetermined services is transmitted, a band-compression coded dig-

ital video signal is subjected to first-encryption processing and then the digital signal is subjected to further encryption processing and transmitted. Therefore, double security can be added to the video signal and a digital signal transmitting method of more firmly ensured security can be realized.

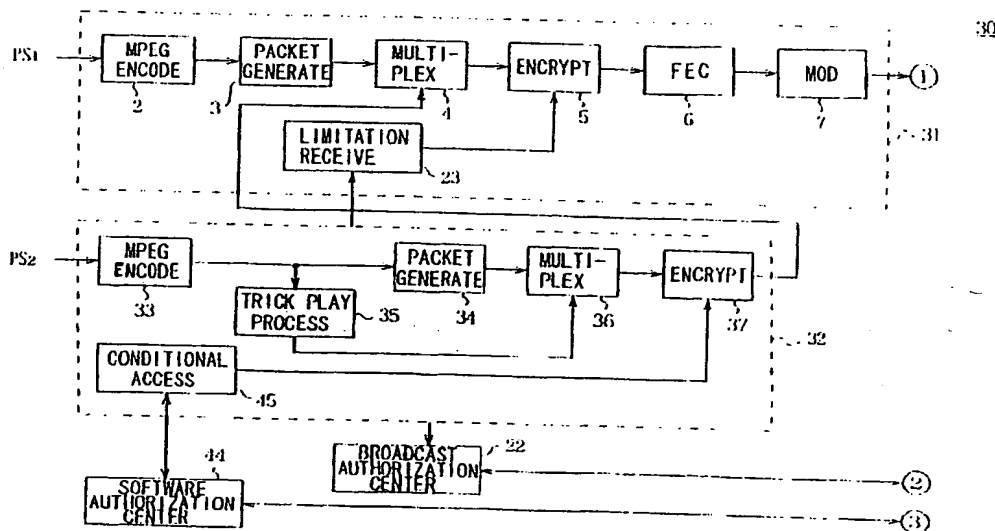


FIG. 4



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 20 0089

| DOCUMENTS CONSIDERED TO BE RELEVANT   |   |  |  |
|---|---|--|--|
| Category  | Citation of document with indication, where appropriate, of relevant passages   | Relevant to claim  | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| Y   | WO 94 10802 A (SCIENTIFIC ATLANTA)<br>11 May 1994 (1994-05-11)<br>* page 1, line 16 - page 3, line 30 *<br>* page 11, line 3 - page 15, line 26 *<br>* page 20, line 16 - page 32, line 5 *<br>* page 38, line 4 - page 41, line 10 *<br>* figures 1-24 *   | 1-12   | H04N7/167                                    |
| Y   | EP 0 506 435 A (SCIENTIFIC ATLANTA)<br>30 September 1992 (1992-09-30)<br>* page 8, line 41 - page 16, line 45 *<br>* figures 4,5,7-10 *<br>* figures 12,13 *  | 1-12   |  |
| A   | STUBBS G S: "CONDITIONAL ACCESS FOR<br>COMPRESSION SYSTEMS: DISERABLE ATTRIBUTES<br>AND SELECTION CRITERIA"<br>PROCEEDINGS FROM ELEVEN TECHNICAL SESSIONS<br>OF THE ANNUAL CONVENTION AND EXPOSITION OF<br>THE NATIONAL CABLE TELEVISION ASSOCIATION,<br>SAN FRANCISCO, JUNE 6 - 9, 1993,<br>no. CONVENTION 42,<br>6 June 1993 (1993-06-06), pages 123-127,<br>XP000410491<br>RUTKOWSKI K<br>* the whole document * | 1-12   |  |
|   |   |  | TECHNICAL FIELDS<br>SEARCHED (Int.Cl.7)      |
|   |   |  | H04N   |
| The present search report has been drawn up for all claims  |   |  |  |
| Place of search   |   | Date of completion of the search   | Examiner                                     |
| THE HAGUE   |   | 30 October 2000  | Van der Zaal, R                              |
| CATEGORY OF CITED DOCUMENTS   |   |  |  |
| X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document |   | T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>& : member of the same patent family, corresponding document |  |

EPD FORM 1503 03 82 (P04C01)



# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 20 0089

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-10-2000

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---------------------|----------------------------|---------------------|
| WO 9410802 A                              | 11-05-1994          | US 5319707 A               | 07-06-1994          |
|   |                     | AU 674721 B                | 09-01-1997          |
|   |                     | AU 5665594 A               | 24-05-1994          |
|   |                     | CA 2149426 A               | 11-05-1994          |
|   |                     | EP 0667082 A               | 16-08-1995          |
| -----                                     |                     |                            |                     |
| EP 0506435 A                              | 30-09-1992          | US 5237610 A               | 17-08-1993          |
|   |                     | AT 144670 T                | 15-11-1996          |
|   |                     | AT 181196 T                | 15-06-1999          |
|   |                     | AT 180373 T                | 15-06-1999          |
|   |                     | AU 650958 B                | 07-07-1994          |
|   |                     | AU 1384092 A               | 01-10-1992          |
|   |                     | BR 9201106 A               | 24-11-1992          |
|   |                     | CN 1066950 A,B             | 09-12-1992          |
|   |                     | DE 69214698 D              | 28-11-1996          |
|   |                     | DE 69214698 T              | 06-03-1997          |
|   |                     | DE 69229235 D              | 24-06-1999          |
|   |                     | DE 69229235 T              | 23-09-1999          |
|   |                     | DE 69229408 D              | 15-07-1999          |
|   |                     | DE 69229408 T              | 11-11-1999          |
|   |                     | EP 0679029 A               | 25-10-1995          |
|   |                     | EP 0683614 A               | 22-11-1995          |
|   |                     | JP 5145923 A               | 11-06-1993          |
|   |                     | SG 44801 A                 | 19-12-1997          |
| -----                                     |                     |                            |                     |

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**